

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/052516 A1**

(51) International Patent Classification<sup>7</sup>:  
7/04 // D21C 9/10

B01F 3/04,

(74) Agents: GRIP, Joakim et al.; Bergensstråle & Lindvall  
AB, P.O. Box 17704, S-118 93 Stockholm (SE).

(21) International Application Number:  
PCT/SE2003/001906

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 8 December 2003 (08.12.2003)

(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:  
0203677-0 12 December 2002 (12.12.2002) SE


(71) Applicant (*for all designated States except US*): METSO  
PAPER, INC. [FI/FI]; P.O. Box 1220, FIN-00101 Helsinki  
(FI).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR MIXING

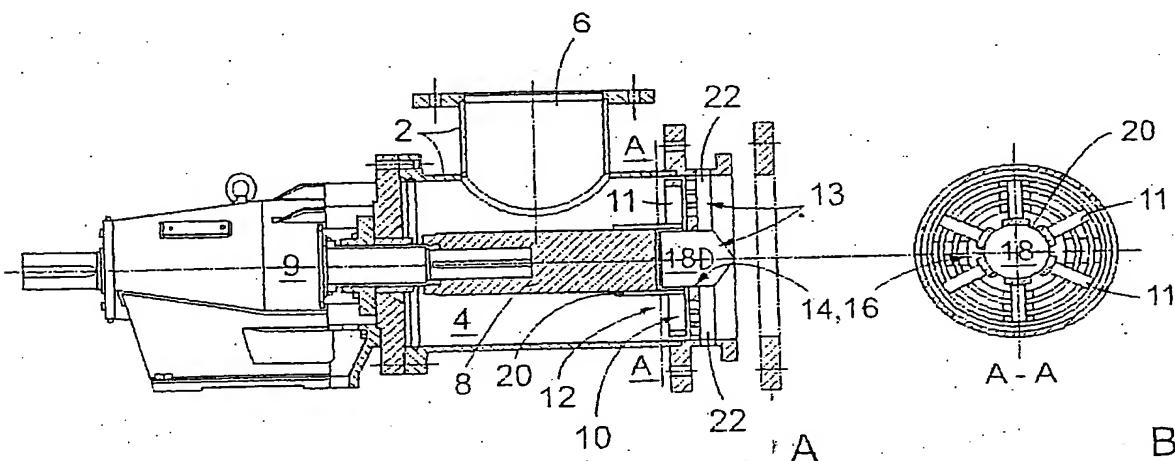

(57) Abstract: The present invention relates to an apparatus for mixing of a chemical medium in gaseous or liquid state with a pulp suspension. The apparatus comprises a housing having a wall (2) that defines a mixing chamber (4), a first feeder (6) for feeding the pulp suspension to the mixing chamber, a rotor shift (8, 204, 300, 406, 502), that extends in the mixing chamber, a drive device for rotation of the rotor shaft, a rotor body (10, 200, 407, 504), that is connected to the rotor shaft and arranged to supply kinetic energy to the pulp suspension flow, during rotation of the rotor shaft by the rotation of the drive device, such that turbulence is produced in a turbulent flow zone (12) in the mixing chamber, a second feeder (13) for feeding of the chemical medium to the mixing chamber, and an outlet for discharging the mixture of chemical medium and pulp suspension from the mixing chamber.

WO 2004/052516 A1

**BEST AVAILABLE COPY**